Principles of Robot Autonomy I

Parametric filtering
(Kalman Filter and Extended Kalman Filter)



Stanford University

Autonomous Systems Lab

Attendance Form



Agenda

- Agenda
  - Parametric filtering: Kalman Filter and Extended Kalman Filter

- Readings:
  - Chapter 12, sections 12.1 – 12.3 in D. Gammelli, J. Lorenzetti, K. Luo, G. Zardini, M. Pavone. *Principles of Robot Autonomy*. 2026.

Belief distribution: recap

- Belief distribution: reflects internal knowledge about the state
- A belief distribution assigns a probability to each possible hypothesis with regard to the true state
- Formally, belief distributions are posterior probabilities over state variables conditioned on the available data

$$bel(x_t) := p(x_t \mid z_{1:t}, u_{1:t})$$

- Similarly, the *prediction* distribution is defined as

$$\overline{bel}(x_t) := p(x_t \mid z_{1:t-1}, u_{1:t})$$

- Calculating $bel(x_t)$ from $\overline{bel}\ (x_t)$ is called correction or measurement update

Bayes filter algorithm: recap

- Bayes' filter algorithm: most general algorithm for calculating beliefs
- Key assumption: state is complete

- Recursive algorithm
  - Step 1 (prediction): compute $\overline{bel}\ (x_t)$
  - Step 2 (measurement update): compute $bel(x_t)$
- Algorithm initialized with $bel(x_0)$ (e.g., uniform or points mass)

Update rule

Data: $bel(x_{t-1}), u_t, z_t$
Result: $bel(x_t)$
foreach x_t **do**
  $\overline{bel}(x_t) = \int p(x_t \mid u_t, x_{t-1})\, bel(x_{t-1})\, dx_{t-1};$
  $bel(x_t) = \eta\, p(z_t \mid x_t)\, \overline{bel}(x_t);$
end
Return $bel(x_t)$

Instantiating the Bayes' filter

- Tractable implementations of Bayes' filter exploit structure and / or approximations; two main classes
  - Parametric filters: e.g., KF, EKF, UKF, etc.
  - Non parametric filters: e.g., histogram filter, particle filter, etc.

Gaussian distributions

- Key idea: belief represented as multivariate normal distribution

Univariate

$$p(x) = (2\pi\sigma^2)^{-\frac{1}{2}} \exp\left(-\frac{1}{2}\frac{(x-\mu)^2}{\sigma^2}\right)$$

$$\sim \mathcal{N}(x; \mu, \sigma^2)$$

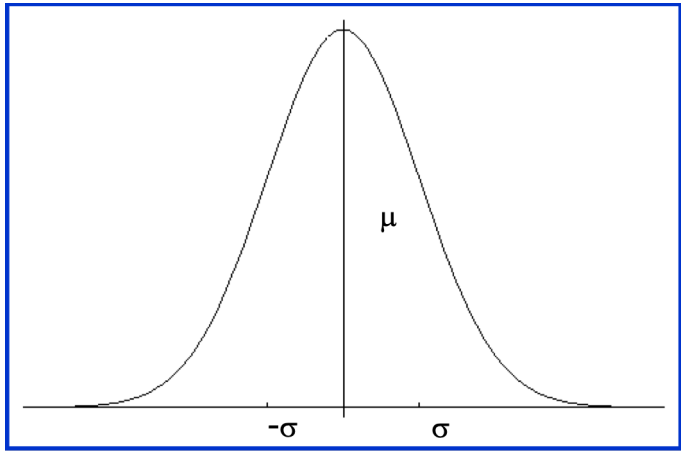

Multivariate

$$p(x) = \det(2\pi\Sigma)^{-\frac{1}{2}} \exp\left(-\frac{1}{2}(x-\mu)^T\Sigma^{-1}(x-\mu)\right)$$

$$\sim \mathcal{N}(\mu, \Sigma)$$

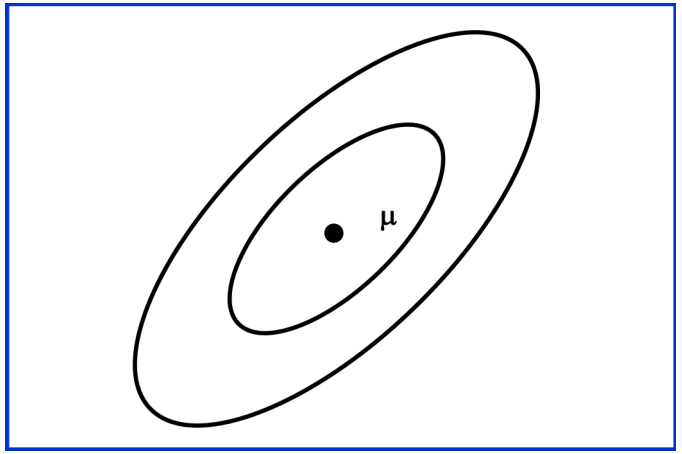

Key properties of Gaussian random variables

- If $X \sim \mathcal{N}(\mu, \Sigma)$ then

$$Y = AX + b \sim \mathcal{N}(A\mu + b,\ A\Sigma A^T)$$

- The sum of two independent Gaussian RVs

$$X_i \sim \mathcal{N}(\mu_i, \Sigma_i), \qquad i = 1, 2$$

is Gaussian, specifically

$$X_1 + X_2 \sim \mathcal{N}(\mu_1 + \mu_2,\ \Sigma_1 + \Sigma_2)$$

- The product of Gaussian pdf is also Gaussian

Kalman filter (KF)

- Assumption #1: linear dynamics

$$x_t = A_t x_{t-1} + B_t u_t + \epsilon_t$$

  - Independent process noise ϵ_t is $\mathcal{N}(0, R_t)$
- Assumption #1 implies that the probabilistic generative model is Gaussian

$$p(x_t \mid u_t, x_{t-1}) = \det(2\pi R_t)^{-\frac{1}{2}} \exp\left(-\frac{1}{2}(x_t - A_t x_{t-1} - B_t u_t)^T R_t^{-1}(x_t - A_t x_{t-1} - B_t u_t)\right)$$

Kalman filter (KF)

- Assumption #2: linear measurement model

$$z_t = C_t x_t + \delta_t$$

  - Independent measurement noise δ_t is $\mathcal{N}(0, Q_t)$
- Assumption #2 implies that the measurement probability is Gaussian

$$p(z_t \mid x_t) = \det(2\pi Q_t)^{-\frac{1}{2}} \exp\left(-\frac{1}{2}(z_t - C_t x_t)^T Q_t^{-1}(z_t - C_t x_t)\right)$$

Kalman filter (KF)

- Assumption #3: the initial belief is Gaussian

$$bel(x_0) = p(x_0) = \det(2\pi\Sigma_0)^{-\frac{1}{2}} \exp\left(-\frac{1}{2}(x_0 - \mu_0)^T \Sigma_0^{-1}(x_0 - \mu_0)\right)$$

- Key fact: These three assumptions ensure that the posterior $bel(x_t)$ is Gaussian for all *t*, i.e., $bel(x_t) = \mathcal{N}(\mu_t, \Sigma_t)$
- Note:
  - KF implements belief computation for continuous states
  - Gaussians are unimodal -> commitment to single-hypothesis filtering

Kalman filter: algorithm

Prediction

Project state ahead

$$\overline{\mu}_t = A_t \mu_{t-1} + B_t u_t$$

Project covariance ahead

$$\overline{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t$$

Correction

Compute Kalman gain

$$K_t = \overline{\Sigma}_t C_t^T (C_t \overline{\Sigma}_t C_t^T + Q_t)^{-1}$$

Update estimate with new measurement

$$\mu_t = \overline{\mu}_t + K_t (z_t - C_t \overline{\mu}_t)$$

Update covariance

$$\Sigma_t = (I - K_t C_t) \overline{\Sigma}_t$$

$bel(x_{t-1})$

Data: $(\mu_{t-1}, \Sigma_{t-1}), u_t, z_t$

Result: (μ_t, Σ_t)

Prediction: $\overline{bel}(x_t)$

$$\overline{\mu}_t = A_t \mu_{t-1} + B_t u_t \ ;$$
$$\overline{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t;$$

Correction: $bel(x_t)$

$$K_t = \overline{\Sigma}_t C_t^T (C_t \overline{\Sigma}_t C_t^T + Q_t)^{-1};$$
$$\mu_t = \overline{\mu}_t + K_t (z_t - C_t \overline{\mu}_t);$$
$$\Sigma_t = (I - K_t C_t) \overline{\Sigma}_t;$$

Return (μ_t, Σ_t)

$bel(x_t)$

Kalman filter: derivation (sketch)

- Prediction

$$\overline{bel}(x_t) = \int p(x_t \mid x_{t-1}, u_t) \quad \cdot \quad bel(x_{t-1})\, dx_{t-1}$$

$$\mathcal{N}(A_t x_{t-1} + B_t u_t, R_t) \qquad \mathcal{N}(\mu_{t-1}, \Sigma_{t-1})$$

- Recalling that $x_t = A_t x_{t-1} + B_t u_t + \epsilon_t$

$$\overline{bel}(x_t) = \mathcal{N}(\overline{\mu}_t, \overline{\Sigma}_t) \qquad \text{with} \qquad \begin{aligned} \overline{\mu}_t &= A_t \mu_{t-1} + B_t u_t \\ \overline{\Sigma}_t &= A_t \Sigma_{t-1} A_t^T + R_t \end{aligned}$$

Kalman filter: derivation (sketch)

- Correction

$$bel(x_t) = \eta \; p(z_t \mid x_t) \quad \cdot \quad \overline{bel(x_t)}$$

$$\mathcal{N}(C_t x_t, Q_t) \qquad \mathcal{N}(\overline{\mu}_t, \overline{\Sigma}_t)$$

- After some algebraic manipulations

$$bel(x_t) = \mathcal{N}(\mu_t, \Sigma_t)$$

with

$$K_t = \overline{\Sigma}_t C_t^T (C_t \overline{\Sigma}_t C_t^T + Q_t)^{-1}$$
$$\mu_t = \overline{\mu}_t + K_t(z_t - C_t \overline{\mu}_t)$$
$$\Sigma_t = (I - K_t C_t)\overline{\Sigma}_t$$

- Other derivations are possible; see, e.g., R. E. Kalman, A new approach to linear filtering and prediction problems. Journal of Basic Engineering, 82(1), 35-45, 1960.

Revisiting linearity assumption

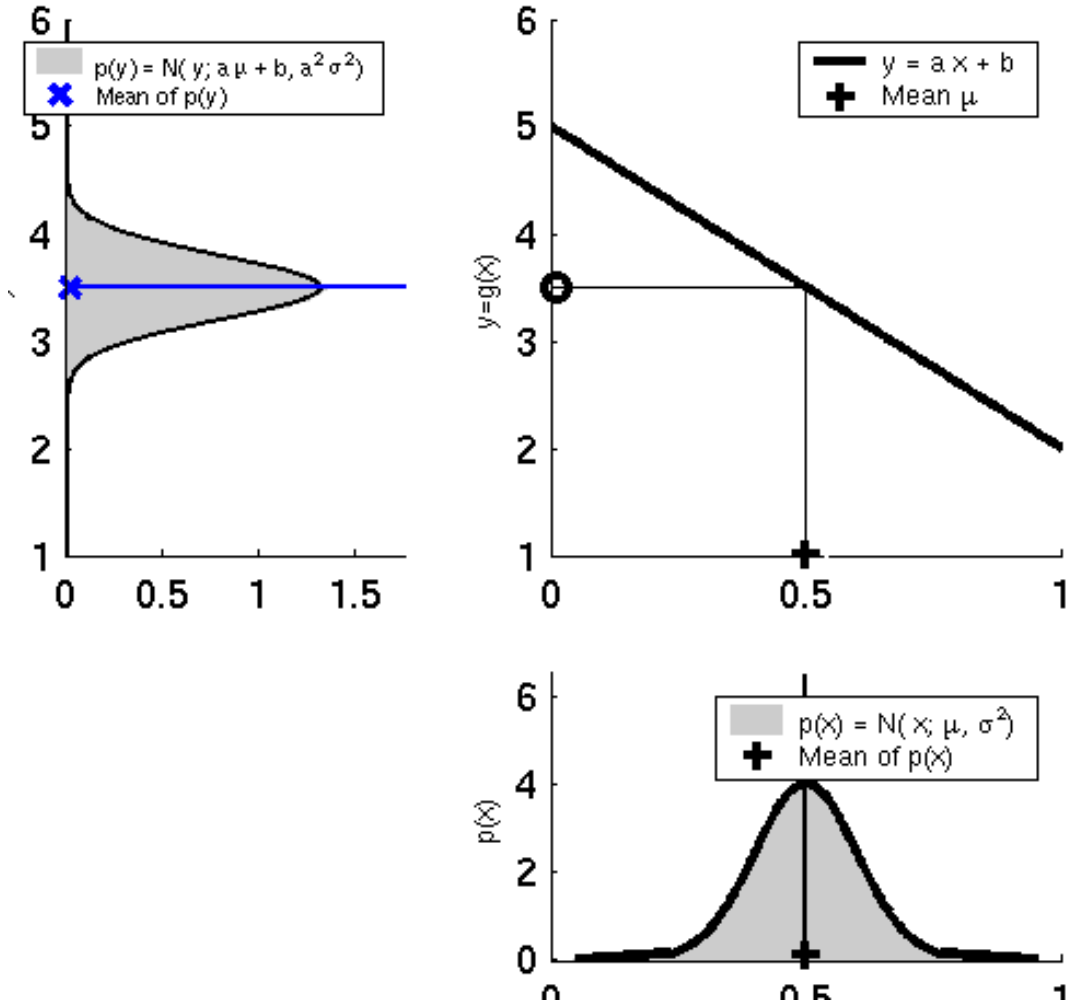

- KF crucially exploits the property that a linear transformation of a Gaussian RV results in a Gaussian RV
- However, linearity assumptions are severely restrictive for robotics applications

Extended Kalman filter (EKF)

- Goal: relax the linearity assumption
- The dynamics are now given by

$$x_t = g(u_t, x_{t-1}) + \epsilon_t$$

- And the measurement model is now given by

$$z_t = h(x_t) + \delta_t$$

- Key idea: shift focus from computing exact posterior to efficiently compute a Gaussian approximation

Goal of EKF

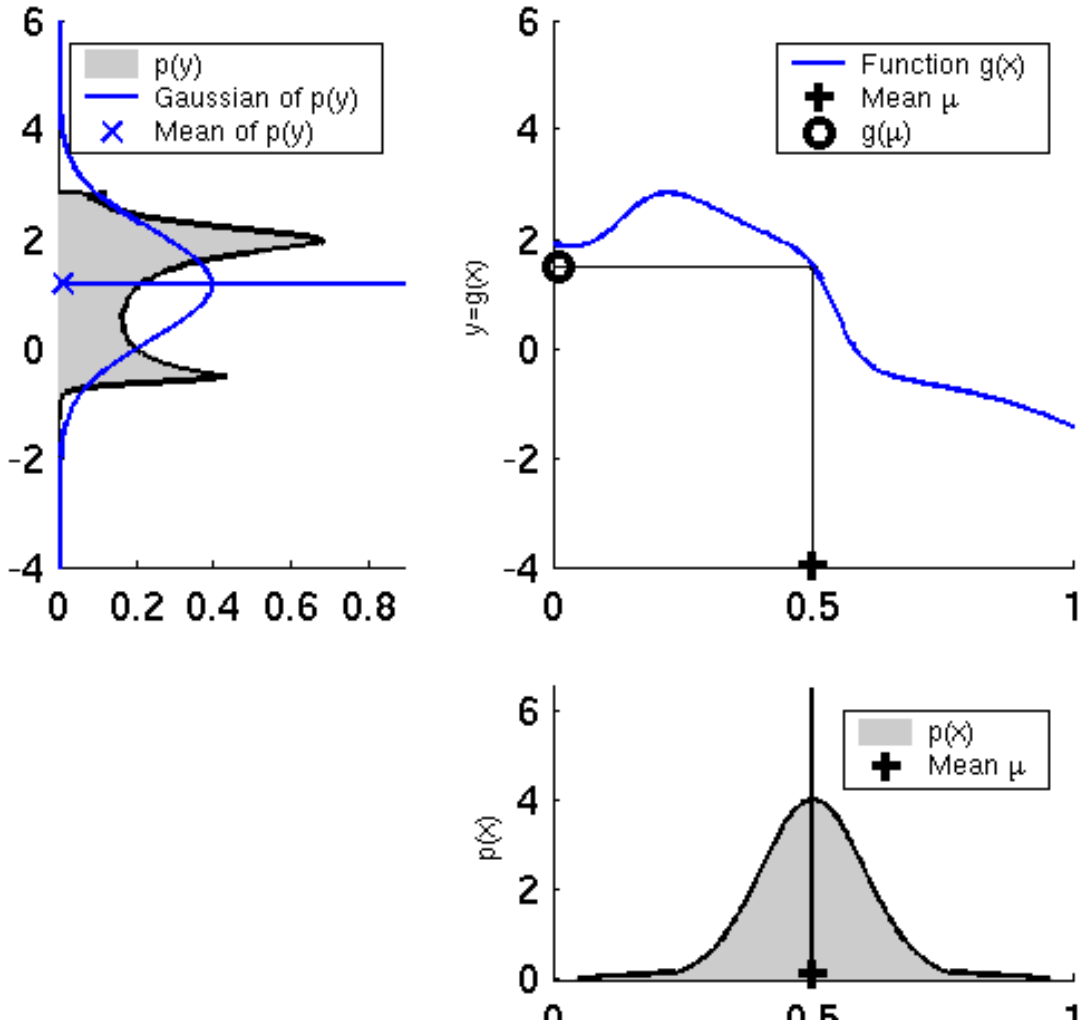

EKF: key idea

- Key idea: linearize *g* and *h* around the most likely state and transform beliefs according to such linear approximations
- For the dynamics equation

$$g(u_t,\, x_{t-1}) \approx g(u_t, \mu_{t-1}) + \underbrace{J_g(u_t, \mu_{t-1})}_{:=G_t}(x_{t-1} - \mu_{t-1})$$

Jacobian of *g*

- Accordingly

$$p(x_t \,|u_t,\, x_{t-1}) = \det(2\pi R_t)^{-1/2}$$
$$\exp\left(-\frac{1}{2}[x_t - g(u_t,\, \mu_{t-1}) - G_t(x_{t-1} - \mu_{t-1})]^T R_t^{-1}[x_t - g(u_t,\, \mu_{t-1}) - G_t(x_{t-1} - \mu_{t-1})]\right)$$

EKF: key idea

- For the measurement model

$$h(x_t) \approx h(\overline{\mu}_t) + \underbrace{J_h(\overline{\mu}_t)}_{:=H_t}(x_t - \overline{\mu}_t)$$

- Accordingly,

$$p(z_t \mid x_t) = \det(2\pi Q_t)^{-1/2} \exp\left(-\frac{1}{2}[z_t - h(\overline{\mu}_t) - H_t(x_t - \overline{\mu}_t)]Q_t^{-1}[z_t - h(\overline{\mu}_t) - H_t(x_t - \overline{\mu}_t)]\right)$$

EKF: algorithm

- Main differences:
  1. Linear predictions are replaced by their nonlinear generalizations
  2. EKF uses Jacobians instead of linear system matrices
  3. Mathematical derivation of EKF parallels that of KF

Data: $(\mu_{t-1}, \Sigma_{t-1}), u_t, z_t$
Result: (μ_t, Σ_t)

$\overline{\mu}_t = g(u_t, \mu_{t-1})$;
$\overline{\Sigma}_t = G_t \Sigma_{t-1} {G_t}^T + R_t$;

$K_t = \overline{\Sigma}_t H_t^T (H_t \overline{\Sigma}_t H_t^T + Q_t)^{-1}$;
$\mu_t = \overline{\mu}_t + K_t(z_t - h(\overline{\mu}_t))$;
$\Sigma_t = (I - K_t H_t)\overline{\Sigma}_t$;

Return (μ_t, Σ_t)

EKF: examples

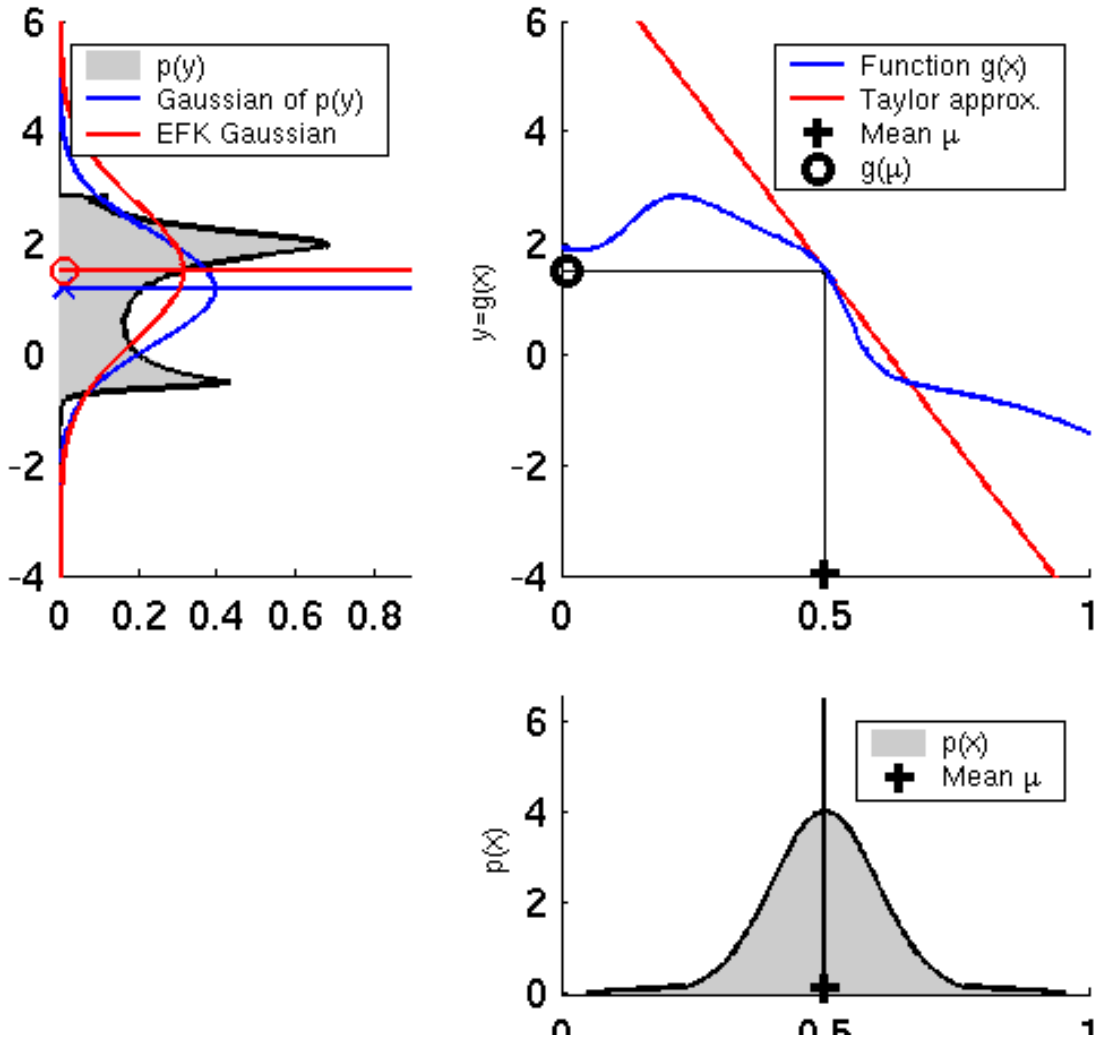

EKF: examples

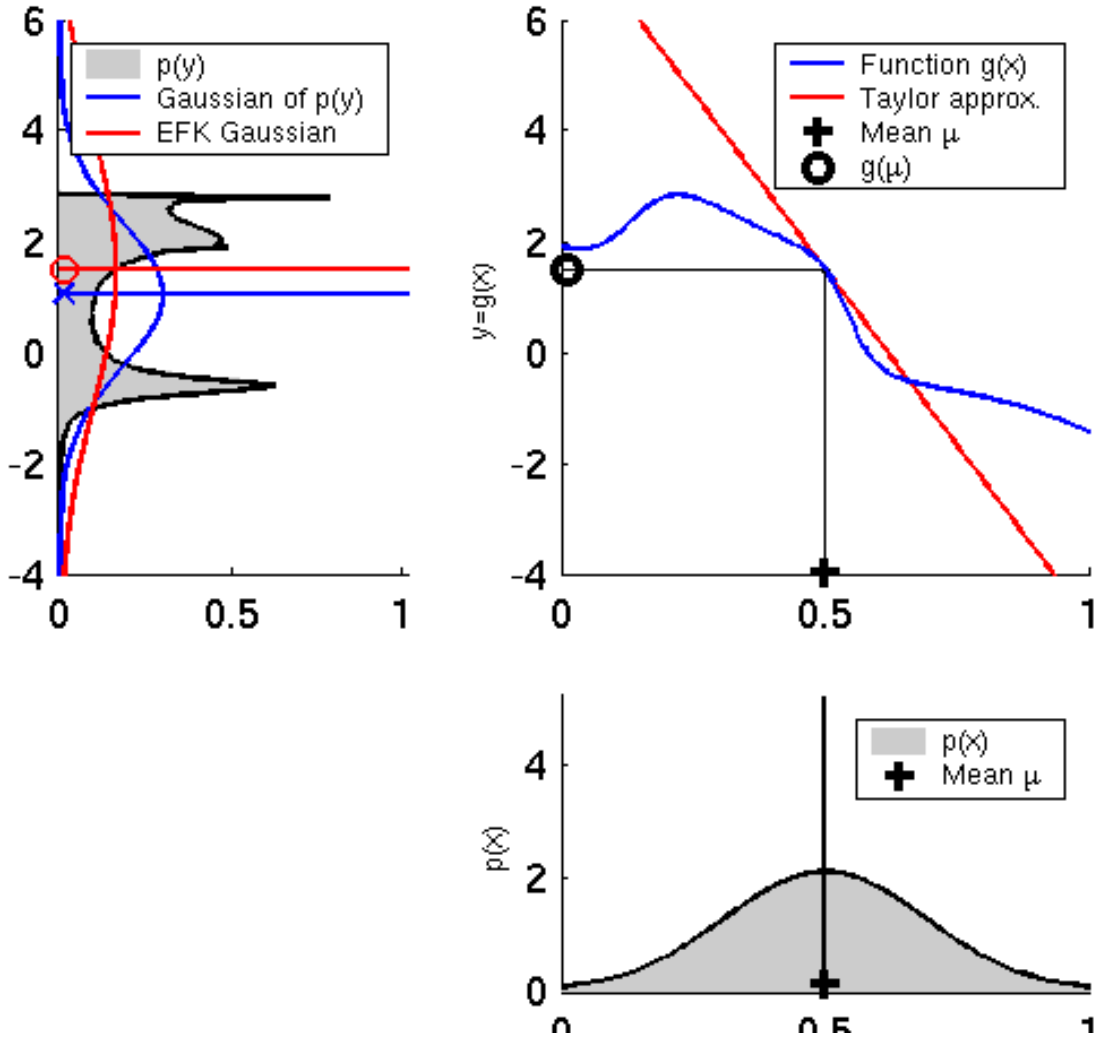

EKF: examples

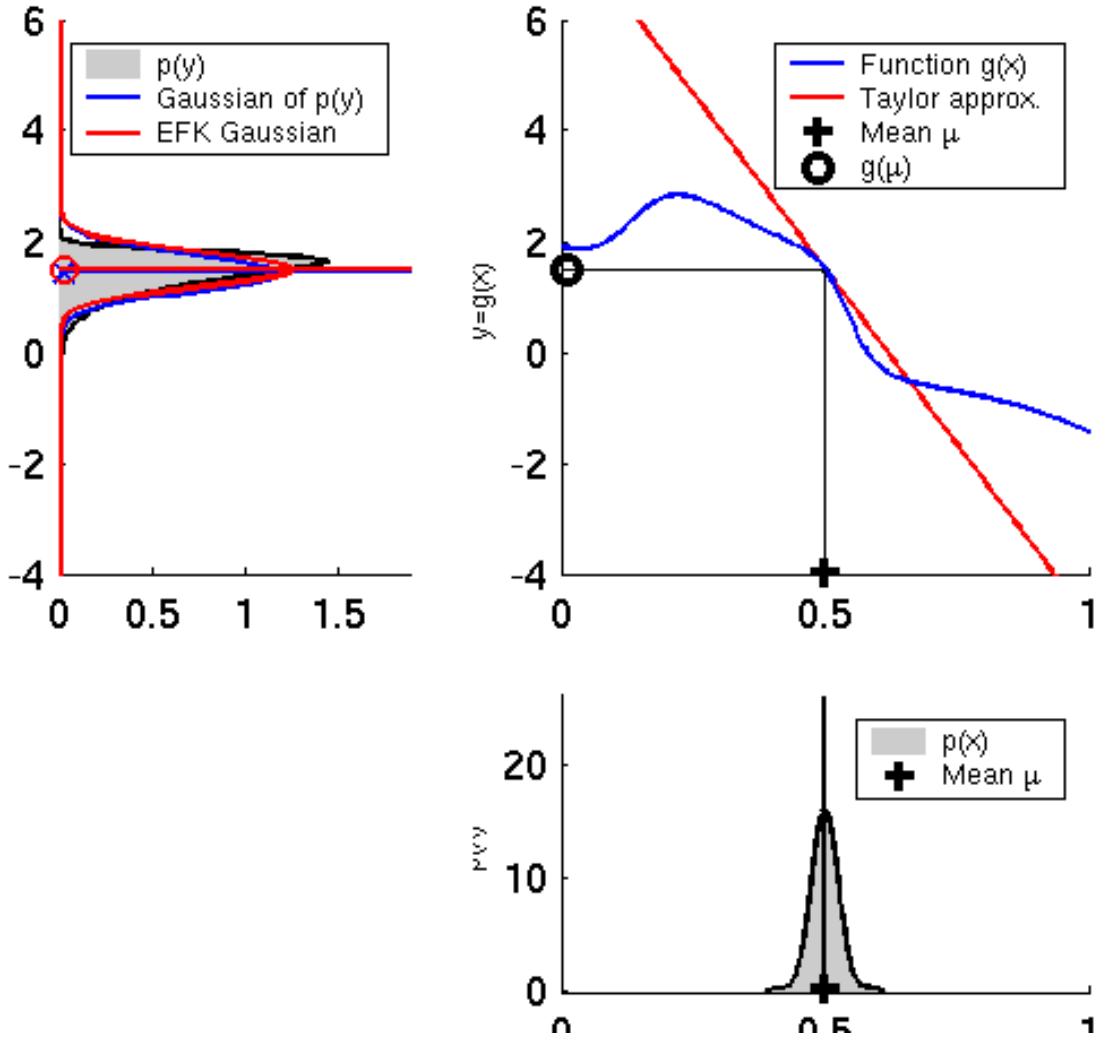

Next time

